



COMBIVERT F6

DRIVE CONTROLLER 2.2 ... 450 kW

EN



CONTENT

PAGE


System overview	3
Benefits at a glance	4
COMBIVERT F6 Variants	6
Functional Safety	8
Technical data	10
COMBIVIS 6	12
Accessories	14
KEB worldwide	15

SYSTEM OVERVIEW

Automation with Drive

stands as a synonym for optimally selected combinations of control and automation solutions with the drive level at the end it is the key to successful machine concepts.


Let the following pages inspire you with regards to the diversity and performance of the COMBIVERT F6 drive controller, and help you to find a solution that reliably meets your requirements.

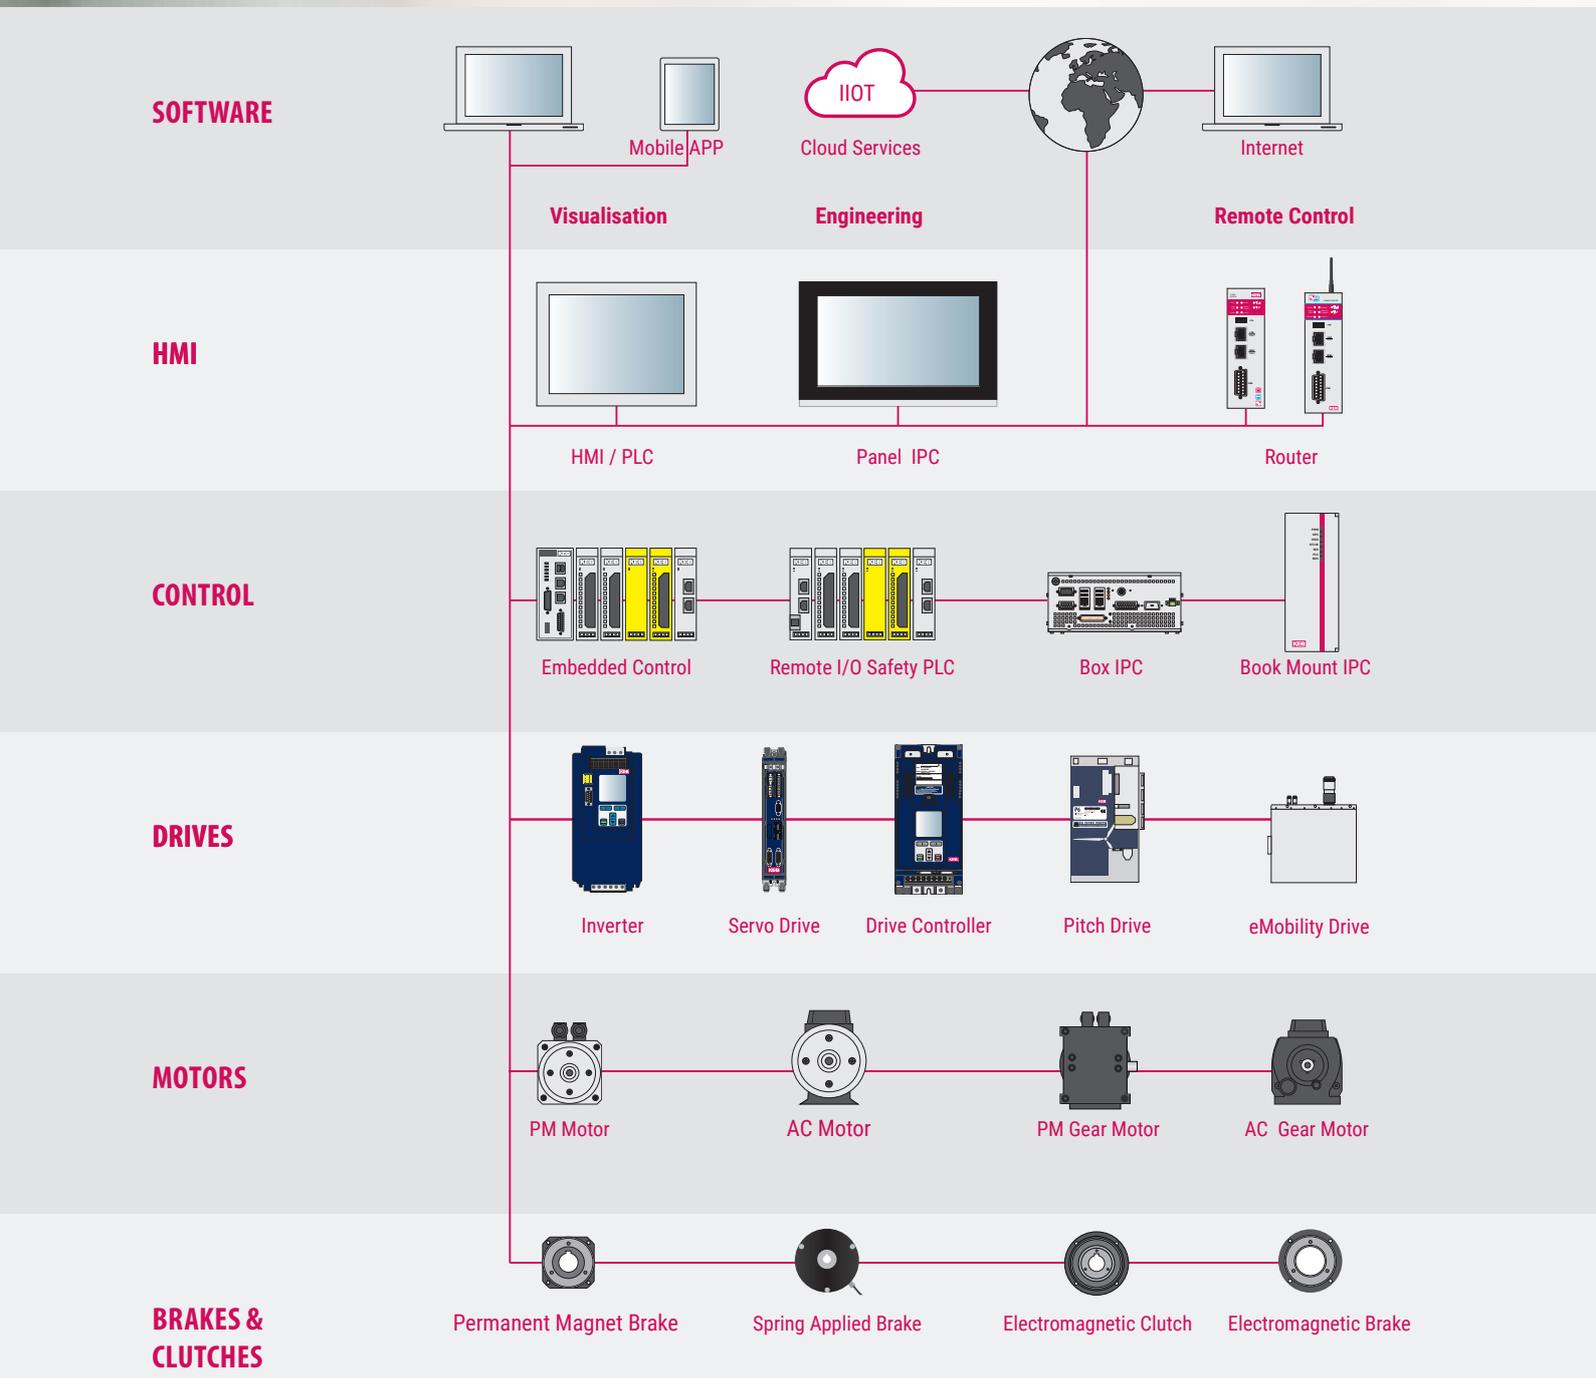

OPTIMALLY SELECTED COMPONENTS

Flexibility, functionality, efficiency and cost-effectiveness are the key requirements for today's drive system. The single axis drive controller COMBIVERT F6, in the power range from 2.2 to 450 kW is covering these requirements and is a perfect extension of the KEB drive portfolio.

The COMBIVERT F6 with its capability to operate different motor types, the various real-time communication to higher-level controllers, the choice of integrated Safety function modules or the cooling concept is the perfect drive controller for every machine. The intuitive PC tool COMBIVIS 6 makes the newly developed KEB drive platform easy to handle.

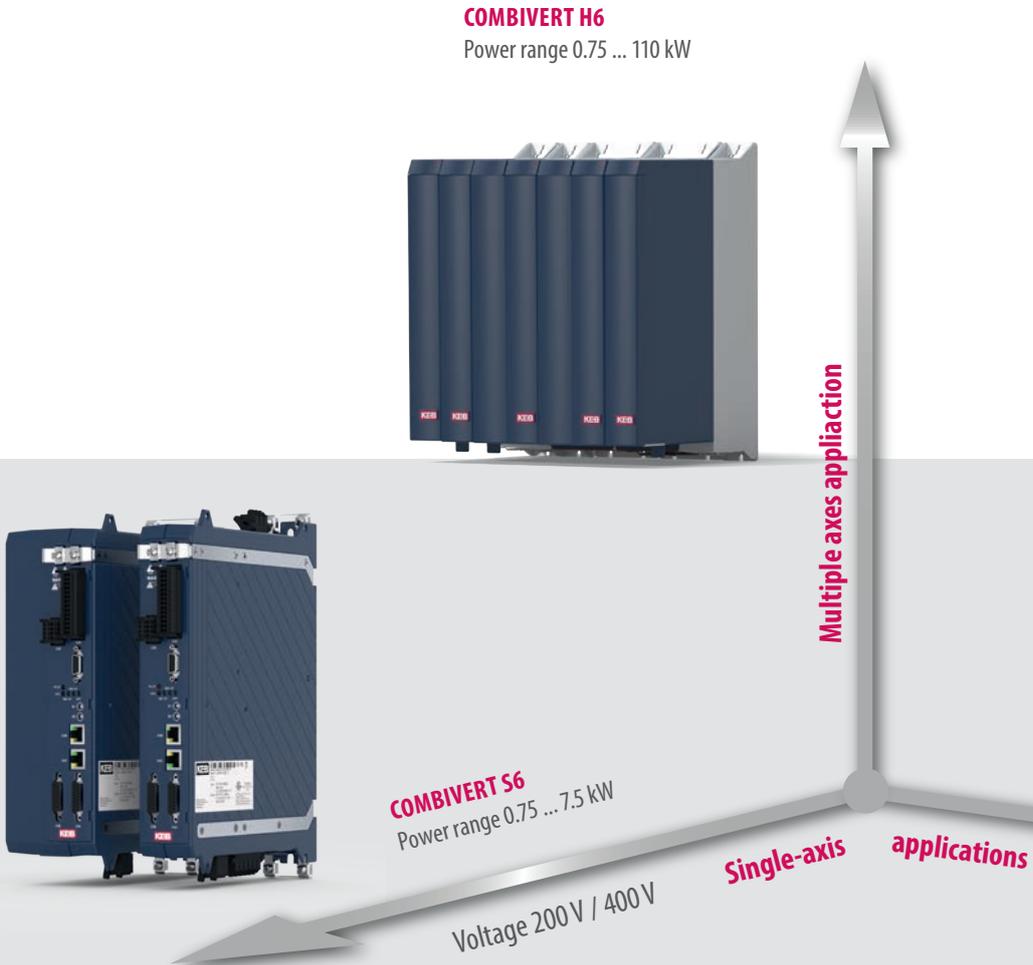

DRIVE BASED SAFETY

- Integrated Safety functionality
- Basic function STO in Compact variant
- Additional High Level Safety in Application variant
- Encoderless safety in variant PRO

REAL - TIME COMMUNICATION

or simply serially

- Real-time Ethernet-based interfaces
- CAN
- RS232/485 for diagnostics or display

ALL IN ONE - UNIVERSAL MOTOR OPERATIONS

- Control for synchronous, asynchronous, IPM or synchronous reluctance motors
- Motor operation with encoder feedback or encoderless ASCL/SCL for precise speed control
- Motor temperature monitoring with PTC, KTY or PT1000 sensors
- Two-channel multi-encoder interface
- Integrated GTR7 brake transistor
- Integrated brake control and brake supply

ANALOG & DIGITAL I/O

supports actual machine concepts with

- 8 digital and 2 analog inputs
- 2 digital and 1 relay output
- 1 analog output 0 ... 10 V



COMBIVERT F6
Power range 2.2 ... 450 kW

Voltage 200 V / 400 V

**HIGHLIGHTS**

- Uncompromising integration, highest performance
- Modern realtime communication standards
- Integrated functional safety
- Particular compact size
- Modular design, flexible cooling systems

COMBIVERT F6 - VARIANTS

FUNCTIONAL SAFETY

INTERFACES

CAN interface
Realtime Ethernet

LCD DISPLAY

LCD Operator
Ethernet Operator
USB Operator

PTC/KTY/PT1000 EVALUATION

BRAKE CONTROL 24 V / 2 A

MAINS CONNECTIONS

I/O

8 digital inputs
2 digital outputs
1 relay
2 analog inputs
1 analog output
24V DC supply

STATUS LEDS

DIAGNOSTIC INTERFACE

MULTI ENCODER INTERFACES

Resolver, EnDAT, HIPERFACE, BISS, SSI,
Incremental HTL/TTL,
Incremental output

MOTOR TERMINALS

DC SUPPLY TERMINALS

and braking resistor

EtherCAT®

Safety over
EtherCAT®



CANopen®



HIGHLIGHTS

- Universally usable for many motor technologies
- Highest performance in torque, speed and position control
- Uncompromising integration
- User-friendly
- Scalable safety functions...

COMPACT
HIGHLY INTEGRATED
AND ECONOMICAL

STO

REALTIME ETHERNET

EtherCAT OR VARAN

Communication interface

CAN
DIAGNOSTIC RS232/485

APPLICATION
MODULAR AND FLEXIBLE

STO, SBC and speed/position related safety functions

REALTIME ETHERNET

EtherCAT
PROFINET
POWERLINK
EtherNet/IP

Communication interface

CAN
DIAGNOSTIC RS232/485

PRO
ENCODERLESS SAFETY

STO, SBC and speed related safety functions without encoder feedback

REALTIME ETHERNET

EtherCAT

Communication interface

CAN
DIAGNOSTIC RS232/485
Ethernet



HIGHLIGHTS

- Brake handling
- Power-off
- DC-brake
- PID controller
- Round table function
- Recipe management
- Multi motor handling
- Anti cogging
- Liquide cooling management
- Etc.

SAFETY FUNCTIONS IN THE DRIVE

BASIS FOR SAFETY

COMPACT

In the Compact variant, the COMBIVERT F6 and S6 drive controllers are equipped with Safe-Torque-Off (STO).


SAFETY FUNCTIONS WITH SPEED AND POSITION MONITORING

APPLICATION

The device variant Application is available in two versions. In addition to STO, Module 1 adds safe brake control (SBC) which provides a safe 24 V supply for the brakes.

Module 3 offers safe motion functionality according to IEC 61800-5-2 through speed and position detection using encoders.

The error reaction time is shortened and costs are reduced by reducing the number of separate protective devices. Module 3 also offers the option of controlling all available safety functions and limit values via Safety over EtherCAT (FSoE).

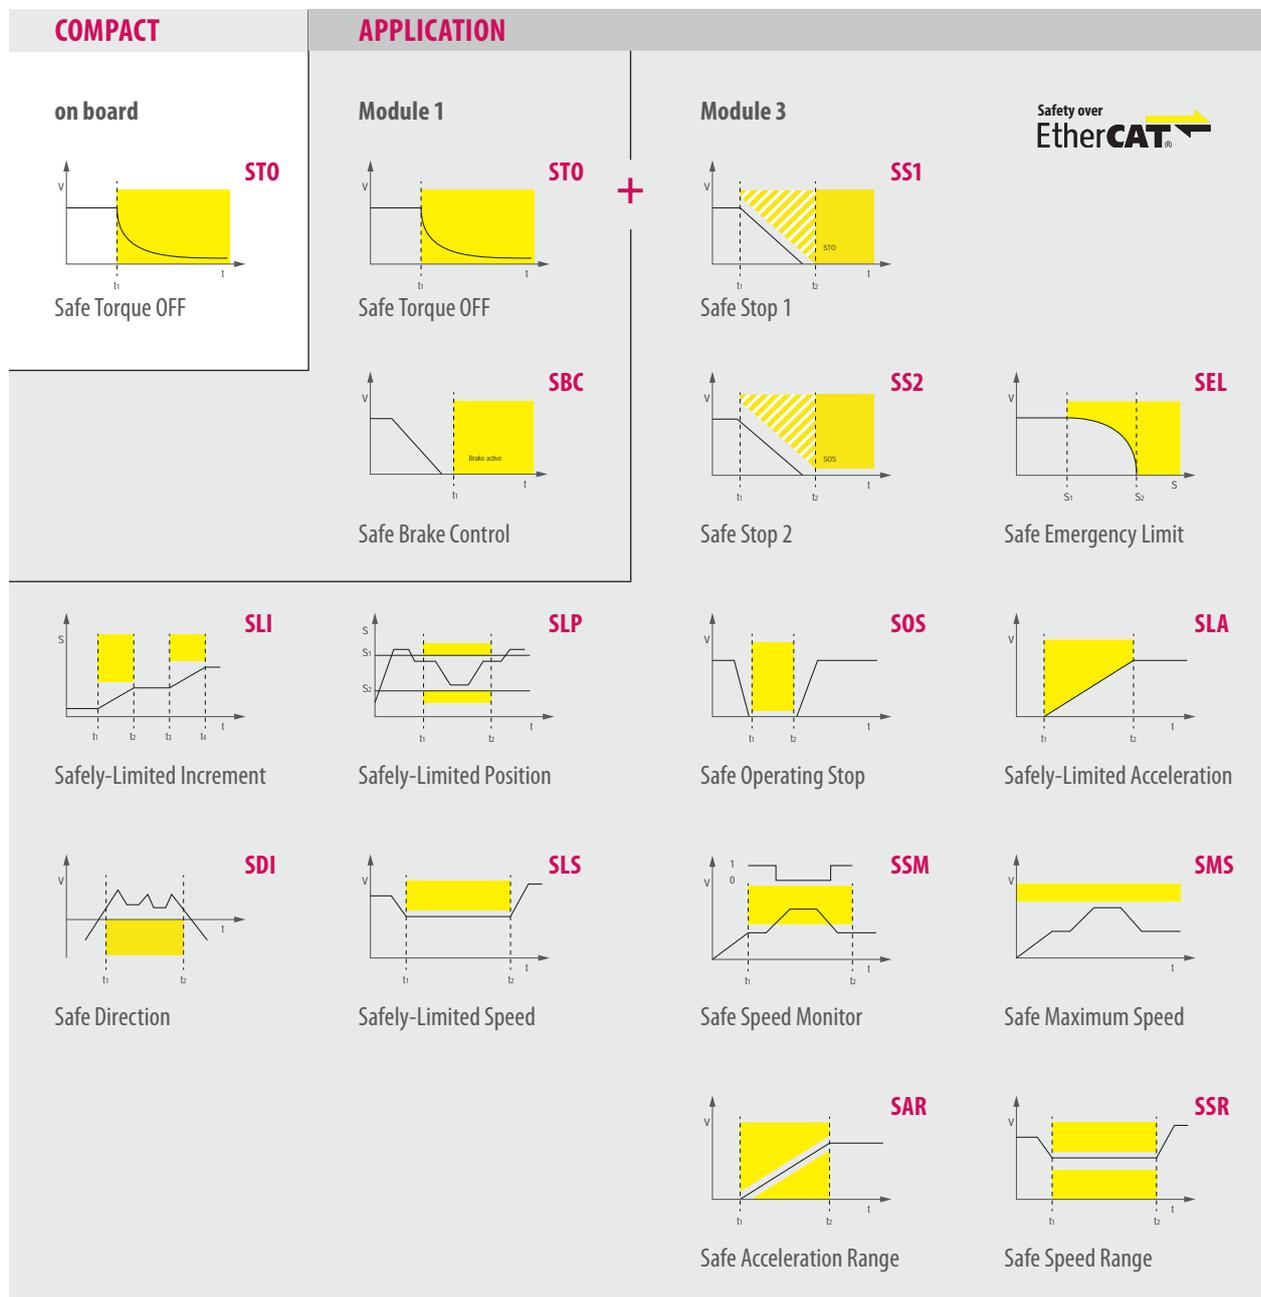

ENCODERLESS SAFETY FUNCTIONS

PRO

The Pro device variant of the COMBIVERT F6 and S6 drive controllers offers advanced safety functions without having to use a safety encoder. The device determines the safe velocity parameters from the pulse width modulation (PWM) of the motor supply.

In addition to STO, Module 5 is equipped with a safe brake control (SBC), which provides a safe 24 V supply for braking operation as well as a monitoring of the switching status of the brake via microswitch evaluation.

Module 5 also offers the option of controlling all available safety functions via Safety over EtherCAT (FSoE).

Module 5

Safe Torque OFF

Safely-Limited Speed

Safe Stop 1

Safely-Limited Acceleration

Safe Maximum Speed

Safe Brake Control

Safe Speed Monitor

Safe Door-Lock Control

Safety over
EtherCAT



WHY USE DRIVE-BASED SAFETY (SAFE MOTION)?

- Less wiring – remove contactors and other traditional safety components
- Fast reaction – direct handling inside the drive
- Easy to operate – up to 8 different safety setups per function
- Cost savings compared to traditional safety solution


COMBIVERT F6 230 V

TECHNICAL DATA

HOUSING		F6-2				F6-3			F6-4
		10	12	13	14	15	16	17	18
Device size									
Rated output power	[kVA]	4.4	7	9.6	13	19	25	30	34
Typical rated motor power	[kW]	2.2	4	5.5	7.5	11	15	18.5	22
Rated output current 230 V	[A]	11	17.5	24	33	48	60	75	85
Rated output current 240 V (UL)	[A]	11	17.5	24	33	48	60	75	85
Short-term current limit (60 s / max.)	[%]	150 / 216		150 / 180		150 / 216			150 / 180
Rated input current 230 V	[A]	16.5	22	30	41.5	on request			101
Rated input current 240 V (UL)	[A]	16.5	22	30	41.5	on request			101
Rated switching frequency	[kHz]	8	4	4	4	2	4	2	4
Max. switching frequency	[kHz]	16							
Mains phases		3							
Rated input voltage (AC)	[V]	230 (UL: 240)							
Input voltage range (AC)	[V]	170 ... 264							
Input voltage range (DC)	[V]	240 ... 373							
Mains frequency	[Hz]	50 / 60 ±2							
Output voltage	[V]	3 x 0 ... U _{IN}							
Output frequency	[Hz]	0 ... 599 (optional 0 ... 2,000)*							

* The maximum possible output frequency depends on the switching frequency

THROUGH MOUNT VERSION

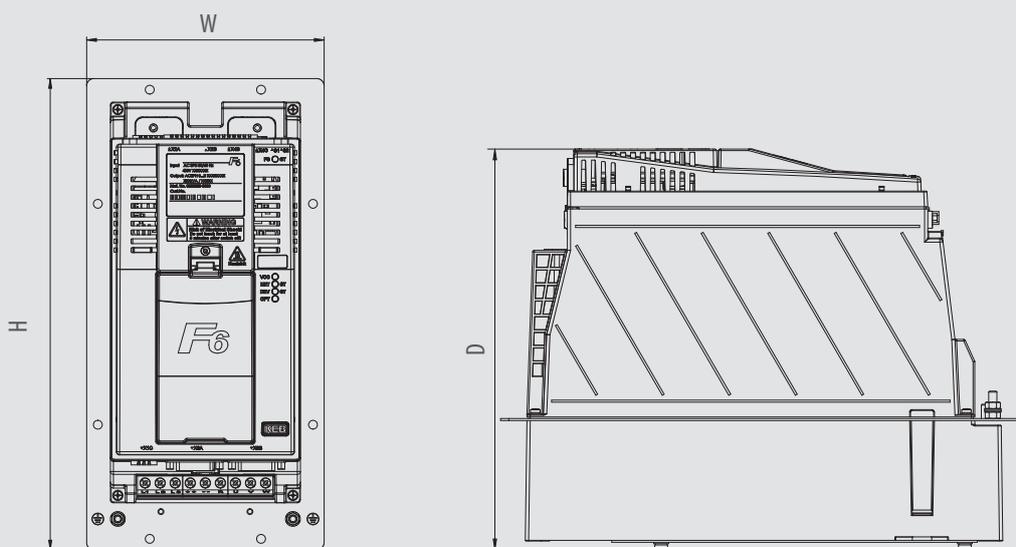

COMBIVERT F6 400 V

HOUSING	Device size	F6-2					F6-3				F6-4				
		12	13	14	15	16	17	18	19	20	19	20	21	22	
	Rated output power	[kVA]	6.6	8.3	11.4	16.6	22.9	29	35	42	52	42	52	62	76
	Typical rated motor power	[kW]	4	5.5	7.5	11	15	18.5	22	30	37	30	37	45	55
	Rated output current 400 V	[A]	9.5	12	16.5	24	33	42	50	60	75	60	75	90	110
	Rated output current 480 V (UL)	[A]	7.6	11	14	21	27	34	40	52	65	52	65	77	96
	Short-term current limit (60 s / max.)	[%]	150 / 216				150 / 180								
	Rated input current 400 V	[A]	13	17	21	31	43	55	59	66	82	66	82	99	121
	Rated input current 480 V (UL)	[A]	11	15	18	27	35	44	48	57	71	57	71	85	106
	Rated switching frequency	[kHz]	8	8	4	4	4	2	2	2 / 4	2	4	4	2	2
	Max. switching frequency	[kHz]	16												
	Mains phases		3												
	Rated input voltage (AC)	[V]	400 (UL: 480)												
	Input voltage range (AC)	[V]	280 ... 550												
	Input voltage range (DC)	[V]	390 ... 780												
	Mains frequency	[Hz]	50 / 60 ±2												
	Output voltage	[V]	3 x 0 ... U _{IN}												
	Output frequency	[Hz]	0 ... 599 (optional 0 ... 2,000)*												

* The maximum possible output frequency depends on the switching frequency

MECHANICAL DIMENSIONS

HOUSING	H*** (mm)	W*** (mm)	D*** (mm)	AIR COOLING		LIQUID COOLING	
				in-built	through mount	in-built	through mount
2	290	130	240	X	X	-	-
3	340	170	261	X	X	-	-
4	375	224	272	X	X	X	X
6	525	249	272	X	X	X	X
7	570	336	360	X	X	X	X
8	860	336	360	X	X	X	X
9	960	503	360	X	X	X	X



*** air cooled in-built version

HOUSING	Device size	F6-6				F6-7				F6-8			F6-9					
		21	22	23	24	25	26	27	28	28	29	30	30	31	32	33**		
	Rated output power	[kVA]	62	80	104	125	145	173	208	256	256	319	395	395	436	492	554	
	Typical rated motor power	[kW]	45	55	75	90	110	132	160	200	200	250	315	315	355	400	450	
	Rated output current 400 V	[A]	90	115	150	180	210	250	300	370	370	460	570	570	630	710	800	
	Rated output current 480 V (UL)	[A]	85	106	124	156	180	210	260	325	302	414	477	477	515	590	719	
	Short-term current limit (60 s / max.)	[%]	150 / 180				125 / 150				150 / 180			125 / 150				
	Rated input current 400 V	[A]	99	126	158	189	221	263	315	390	390	485	600	600	700	746	840	
	Rated input current 480 V (UL)	[A]	85	106	128	162	186	217	269	337	374	429	494	494	533	611	744	
	Rated switching frequency	[kHz]	8	4	2/4/8**	2	4	4	2	2	4	2	2	2	2	2	2	
	Max. switching frequency	[kHz]	16												4			
	Mains phases		3															
	Rated input voltage (AC)	[V]	400 (UL: 480)															
	Input voltage range (AC)	[V]	280 ... 550															
	Input voltage range (DC)	[V]	390 ... 780															
	Mains frequency	[Hz]	50 / 60 +/- 2															
	Output voltage	[V]	3 x 0 ... U _{IN}															
	Output frequency	[Hz]	0 ... 599 (optional 0 ... 2,000)*															


* The maximum possible output frequency depends on the switching frequency

** Liquid cooled only


BUILT-IN VARIANT

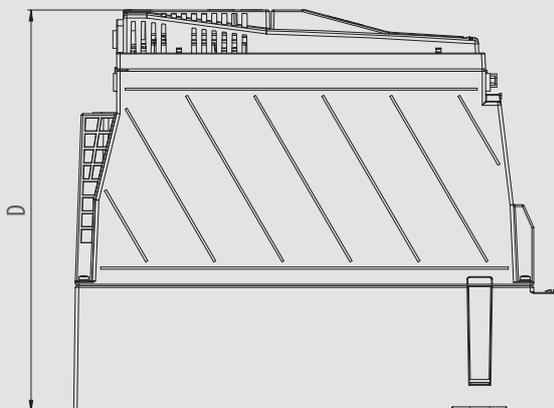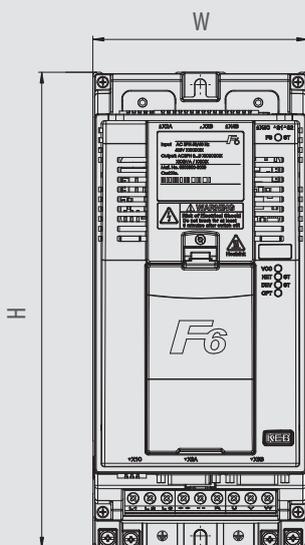


Air-cooled built-in variant

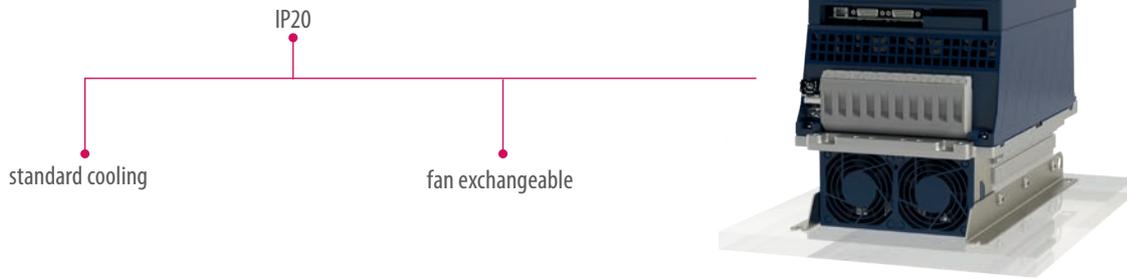


Air-cooled push-through variant

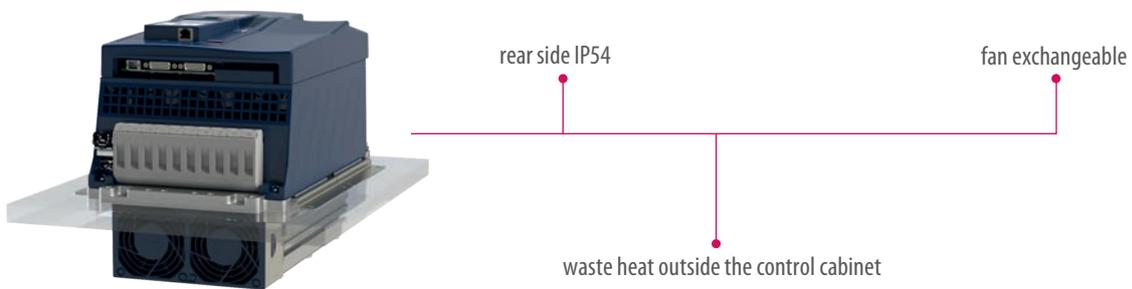

Liquid-cooled built-in variant

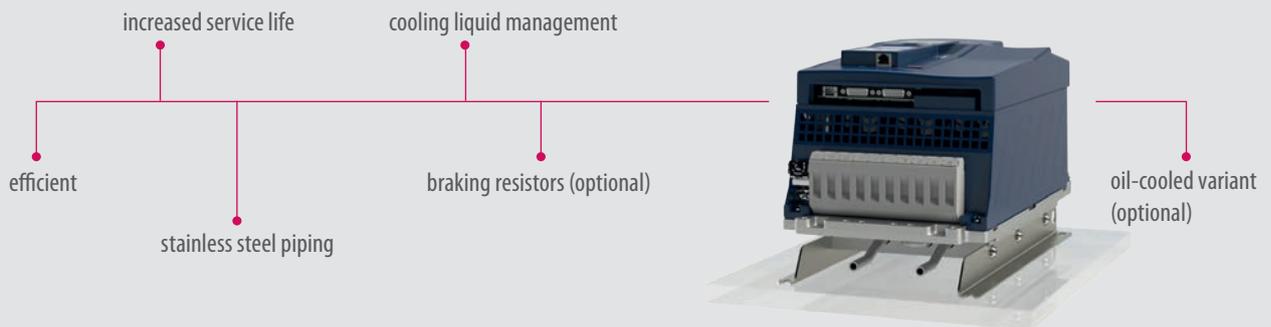

Liquid-cooled push-through variant

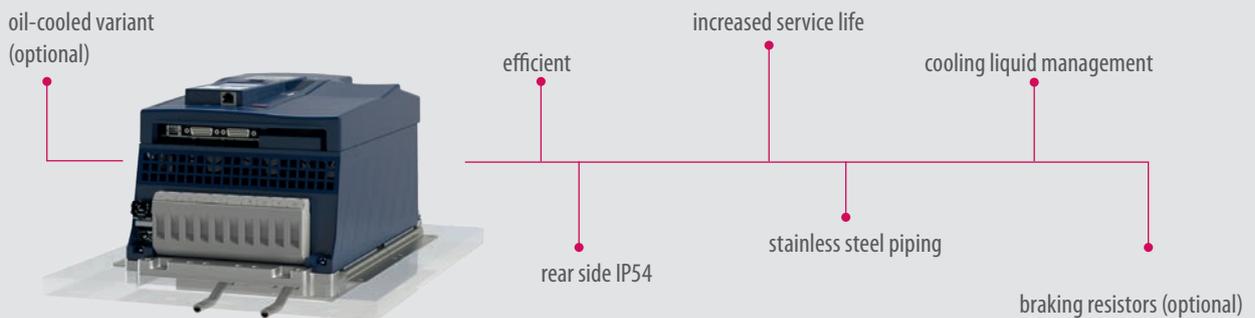

COMBIVIS 6 - THE TOOL FOR ALL TASKS

COMBIVIS 6

- Free and easy-to-use software for startup, administration and analysis
- Integrated start-up assistants (Wizards) for quick and easy configuration
- Direct access to device documentation
- 16 channel oscilloscope for extensive analysis
- Online parameter list comparison
- Parameterisation of key safety indicators and functions



COMBIVIS studio 6

The intelligent automation suite from KEB combines an assistant-guided component selection, fieldbus configuration, drive parameterisation, IEC 61131-3 project generation and motion control. Throughout the planning and layout phase, implementation of control sequences and multi-axis movement profiles, to start-up and fine tuning, the user is supported by a tool developed by experienced application engineers.


With a foundation built on libraries, devices and template databases, rapid and simple solutions can be generated for a wide range of applications.

COMMISSIONING ASSISTANT

- Complete user guidance through the commissioning process
- KEB Motor database, free for extensions
- Anti cogging
- Fieldbus diagnostic and optimisation

SYSTEM CONFIGURATION AS A COMPONENT OF COMBIVIS

- Access to KEB product database
- Intuitive gear component selection and system configuration using drag and drop
- Selection assistant with display of compatible components
- Display of all interfaces and connection components
- Material number generator
- Extensive export function for quote list, COMBIVIS Project, Excel ...

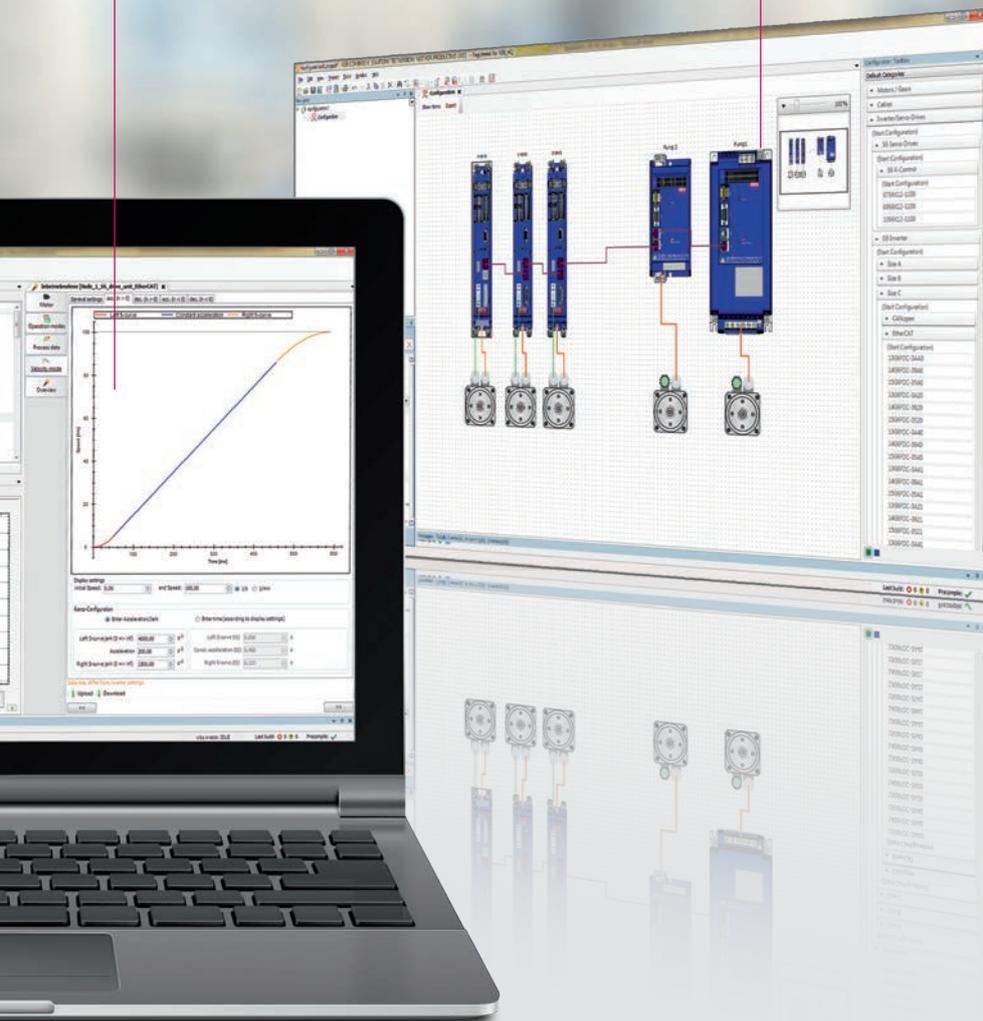

HIGHLIGHTS

- IEC 61131-3 Applications development
- Device and library database
- Product configuration
- Start-up and diagnosis assistant
- COMBIVIS studio HMI integration
- Document database

ACCESSORIES

STABLE OPERATION IN INDUSTRIAL ENVIRONMENT

An EMC-compliant assembly with efficient control cabinet and suppression system is the basis for safe operation of machinery and equipment. The current and voltage limiting COMBILINE modules are optimally designed to meet the requirements of the COMBIVERT F6 drive controller series and support the use through:



MAINS EMC FILTERS

Reduce the cable-fed emission to the required limits IEC 61800-3 - C1/C2. Further variants offer low leakage currents or the operation of special mains networks, additionally available as submounted filter for COMBIVERT F6.

MAINS CHOKES

Reduce the input peak current draw and the mains distortion. By smoothing the input current draw, the lifetime of the drive is enhanced, in particular at constantly high utilization.

OUTPUT CHOKES AND FILTERS

Reduce the voltage and current stress of the motor winding.

INPUT / OUTPUT COMBI FILTERS

Space-saving combination, consistently adapted and optimised to the drive controller.

SINE-WAVE FILTERS

Protect the motor winding from voltage peaks and allow the use of long motor cables.

HARMONIC FILTERS


Reduce the low frequency mains distortion of B6-rectifier supplied devices. These harmonic filters are the innovative solution to comply to most international standards. The integration to a switch gear layout is as simple as of mains chokes.

SINE-WAVE EMC FILTERS

Allow operation of motors with long motor cables even without screening.

HIGH PERFORMANCE FERRITE CORES

Reduces the values of du/dt 's also in the frequency range of the bearing currents.

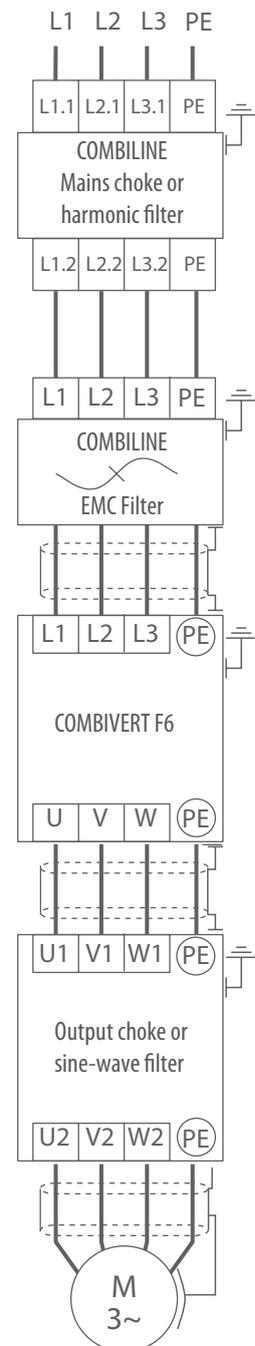

KEB WORLDWIDE

Austria | KEB Automation GmbH
Ritzstraße 8 4614 Marchtrenk Austria
Phone: +43 7243 53586-0 Fax: +43 7243 53586-21
E-Mail: info@keb.at Internet: www.keb.at

Benelux | KEB Automation KG
Dreef 4 – box 4 1703 Dilbeek Belgium
Phone: +32 2 447 8580
E-Mail: info.benelux@keb.de Internet: www.keb.de

Czech Republic | KEB Automation GmbH
Videnska 188/119d 61900 Brno Czech Republic
Phone: +420 544 212 008
E-Mail: info@keb.cz Internet: www.keb.cz

France | Société Française KEB SASU
Z.I. de la Croix St. Nicolas 14, rue Gustave Eiffel
94510 La Queue en Brie France
Phone: +33 149620101 Fax: +33 145767495
E-Mail: info@keb.fr Internet: www.keb.fr

Germany | Gearing Motors
KEB Antriebstechnik GmbH
Wildbacher Straße 5 08289 Schneeberg Germany
Phone: +49 3772 67-0 Fax +49 3772 67-281
E-Mail: info@keb-drive.de Internet: www.keb-drive.de

Italy | KEB Italia S.r.l. Unipersonale
Via Newton, 2 20019 Settimo Milanese (Milano) Italy
Phone: +39 02 3353531 Fax: +39 02 33500790
E-Mail: info@keb.it Internet: www.keb.it

Japan | KEB Japan Ltd.
15 - 16, 2 - Chome, Takanawa Minato-ku
Tokyo 108 - 0074 Japan
Phone: +81 33 445-8515 Fax: +81 33 445-8215
E-Mail: info@keb.jp Internet: www.keb.jp

P. R. China | KEB Power Transmission Technology (Shanghai) Co. Ltd.
No. 435 QianPu Road Chedun Town Songjiang District
201611 Shanghai P. R. China
Phone: +86 21 37746688 Fax: +86 21 37746600
E-Mail: info@keb.cn Internet: www.keb.cn

Poland | KEB Automation KG
Phone: +48 604 077 727
E-Mail: roman.trinczek@keb.de Internet: www.keb.de

Republic of Korea | KEB Automation KG
Deoksan-Besttel 1132 ho Sangnam-ro 37
Seongsan-gu Changwon-si Gyeongsangnam-do Republic of Korea
Phone: +82 55 601 5505 Fax: +82 55 601 5506
E-Mail: jaeok.kim@keb.de Internet: www.keb.de

Spain | KEB Automation KG
c / Mitjer, Nave 8 - Pol. Ind. LA MASIA
08798 Sant Cugat Sesgarrigues (Barcelona) Spain
Phone: +34 93 8970268 Fax: +34 93 8992035
E-Mail: vb.espana@keb.de Internet: www.keb.de

Switzerland | KEB Automation AG
Witzbergstraße 24 8330 Pfaeffikon/ZH Switzerland
Phone: +41 43 2886060 Fax: +41 43 2886088
E-Mail: info@keb.ch Internet: www.keb.ch

United Kingdom | KEB (UK) Ltd.
5 Morris Close Park Farm Industrial Estate
Wellingborough, Northants, NN8 6XF United Kingdom
Phone: +44 1933 402220 Fax: +44 1933 400724
E-Mail: info@keb.co.uk Internet: www.keb.co.uk

United States | KEB America, Inc.
5100 Valley Industrial Blvd. South
Shakopee, MN 55379 United States
Phone: +1 952 2241400 Fax: +1 952 2241499
E-Mail: info@kebameric.com Internet: www.kebameric.com



KEB PARTNERS WORLDWIDE

... www.keb.de/contact/contact-worldwide



Automation with Drive

keb-automation.com

KEB Automation KG Suedstrasse 38 32683 Barntrup Germany Tel. +49 5263 401-0 E-Mail: info@keb.de

© KEB 0000000-52F6 06.2021 Subject to technical alterations!