

Radar Sensor Solutions



Radar Sensing

The ultimate outdoor sensing solution

Benefits of Radar Sensing

Resistant to wind, rain, snow, fog, and sunlight



Long sensing range




No moving parts, durable, less downtime



Operates across a wide temperature range to function in extreme environments



Highly resistant to interference or crosstalk




Detects moving and stationary objects



Operating Frequency

Different radar frequencies affect not only the range of the sensor but also what materials it can detect. 24 GHz radar has a long range and ignores ambient weather like heavy rain or snow. However, its detection is limited to stronger radar targets. 122 GHz radar provides greatly increased accuracy and can see a much wider range of materials compared to 24 GHz. 60 GHz conveniently falls between 24 GHz and 122 GHz in terms of performance. It has remarkable resistance to ambient weather and can detect a similar range of materials to 122 GHz with a better accuracy than 24 GHz.

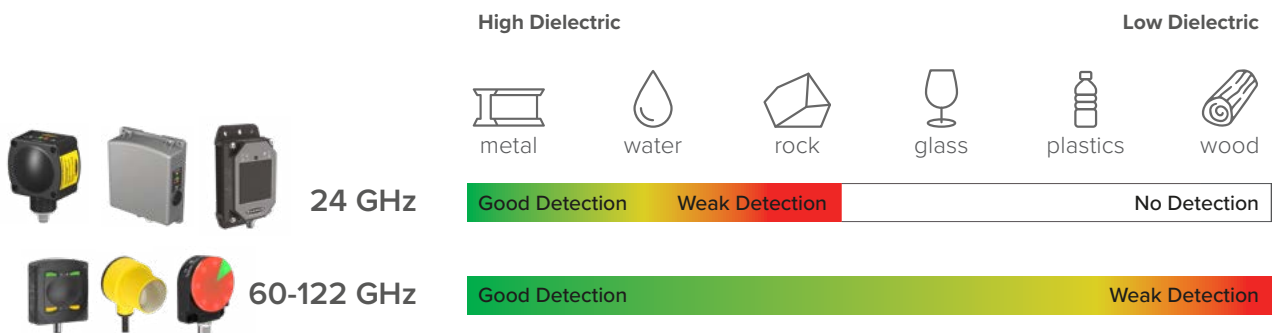


Metal, water, and other high-dielectric materials provide a stronger return signal than plastic, wood, or other organic materials.

Beam Pattern Considerations

Radar sensors are available in narrow and wide beam patterns. Narrow beam patterns avoid false detection of objects outside of the region of interest and allow for a more precise measurement. Wide beam patterns provide coverage of larger areas and provide more reliable detection of irregular surfaces and targets presented at steep angles.

Narrow Beam Applications

- Drive-thru
- Overhead crane
- Tank level
- Gantry crane
- Loading docks




Wide Beam Applications


- Mobile equipment collision avoidance
- Vehicle detection: trains, cars, boats



Adjustable-Field (Diffuse) and Retroreflective Radar Sensors



An adjustable-field radar sensor can detect vehicles and other objects by sensing the reflection of the radio waves bouncing off the object.




A retroreflective radar sensor uses a taught reference condition like a wall, floor, or special retroreflective target. The sensor detects objects between it and the reference target by looking for disruptions in the signal coming back from the reference target.

Retroreflective sensing has the most reliable detection with no dead zone. The output will turn on even if the object being sensed does not reflect the signal back to the sensor, as long as it blocks or disrupts the signal from the reference target.

Configuration

DIP Switch Configuration

- Easy to set up
- No PC required



Banner Measurement Sensor Software

- Clear visual of the entire sensor view for setup and troubleshooting
- Tamper-proof



Remote Teach

- Remotely configure sensor
- No manual interaction required



IO-Link®

- Read and change device remotely
- Dynamically change parameters




Push Button


- Simple configuration
- Click and teach



Configurable, Multi-Dimensional Detection



Choosing a Banner Radar Sensor

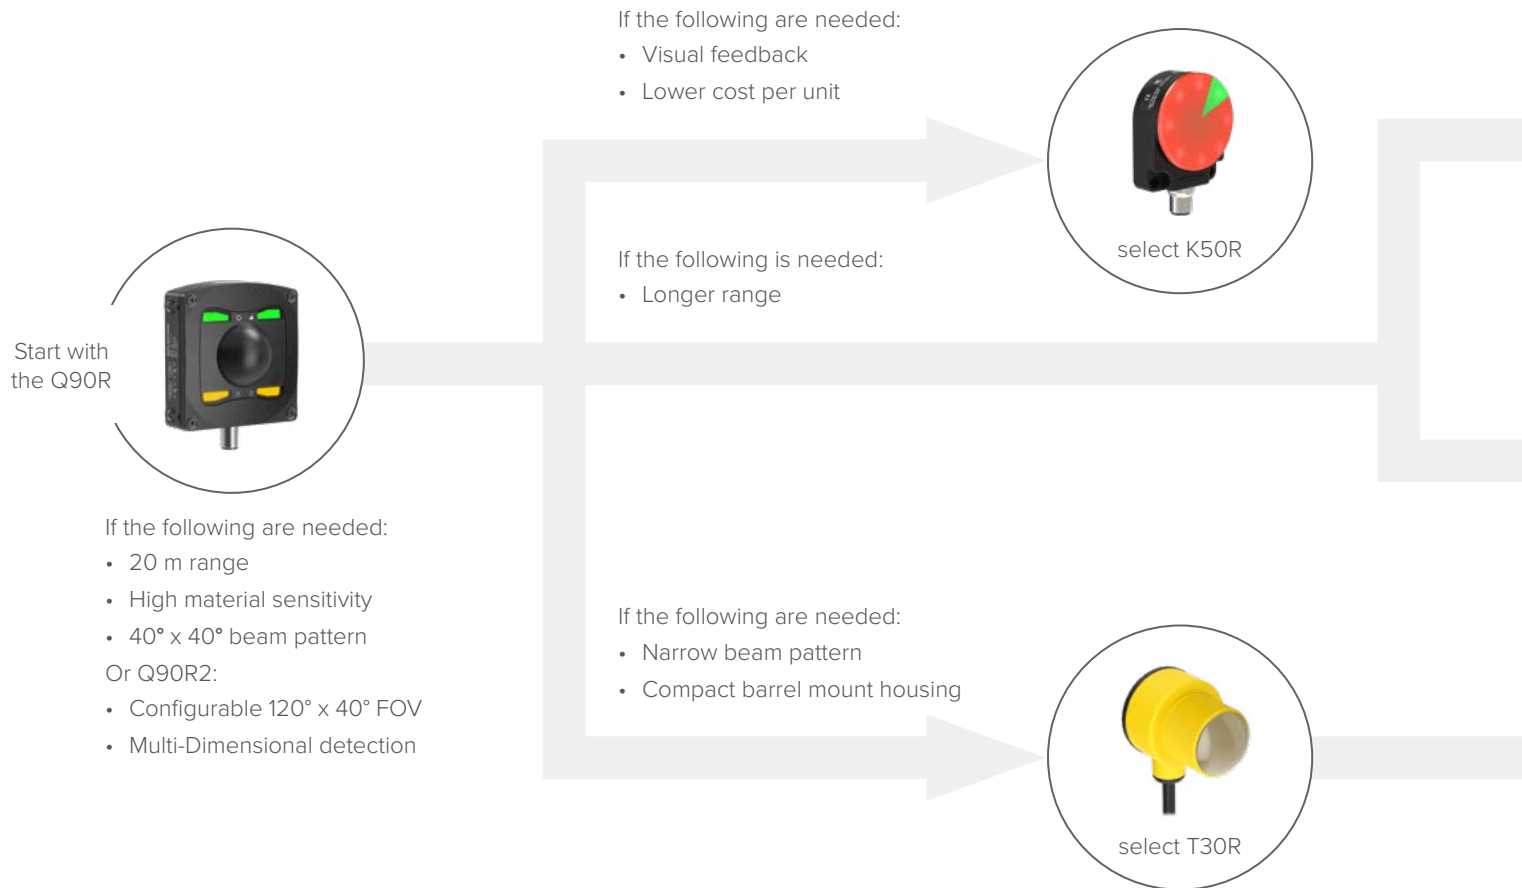

| | Q90R | Q90R2 | T30R | T30RW |
|-----------------------------|--------------------------------------|------------------------------|--------------------------------------|-----------|
| Frequency | 60 GHz, 77 GHz* | | 122 GHz | |
| Sensing Range (m) | 20 | | 6, 10, 15, or 25 | 15 |
| Configurable Sensing Zones | 2 | | 2 | |
| Beam Pattern (Horz x Vert) | 40° x 40° | 120° x 40° (Configurable) | 15° x 15° or 45° x 45° | 15° x 15° |
| Interfaces | Discrete, analog, Pulse-Pro, IO-Link | | Discrete, analog, Pulse-Pro, IO-Link | |
| Sensitivity | ✓ ✓ ✓ | | ✓ ✓ ✓ | |
| Accuracy | ✓ ✓ ✓ | | ✓ ✓ ✓ | |
| Ambient Weather Performance | ✓ ✓ | | ✓ ✓ | |
| Configuration | PC GUI, remote input | | PC GUI, push buttons, remote input | |

*Global telecom approval for use in mobile equipment applications

If the following is needed:

- DIP switch configuration



If the following is needed:

- PC GUI for programming



If the following are needed:

- IP69K washdown rating
- Process fittings



If the following is needed:

- Longest range



K50R



Q130R



QT50R



Q240R

| K50R | Q130R | QT50R | Q240R |
|------------------------------|------------------------|------------------|--------------|
| 60 GHz | 24 GHz | 24 GHz | 24 GHz |
| 5 | 24 or 40 | 3.5, 12, or 24 | 40 or 100 |
| 2 | 1 | 1 or 2 | 2 |
| 80° x 60° or 40° x 30° | 90° x 76° or 24° x 50° | 90° x 76° | 11° x 13° |
| Discrete, Pulse-Pro, IO-Link | Discrete | Discrete, analog | Discrete |
| ✓ ✓ | ✓ | ✓ | ✓ |
| ✓ ✓ | ✓ | ✓ | ✓ |
| ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ |
| PC GUI, remote input | PC GUI, remote input | DIP switches | DIP switches |

Visit bannerengineering.com for more solutions

Vehicle Detection

Radar sensors use Frequency Modulated Continuous Wave (FMCW) technology to reliably detect targets, including cranes, cars, trains, trucks, and cargo in extreme weather conditions. FMCW radar is an ideal solution for these applications because it can detect moving and stationary objects in all weather conditions.

The ability to reliably detect vehicles offers significant advantages for asset management, resource allocation, site safety, traffic control, and loading-dock monitoring. Application needs and deployment requirements can be diverse, ranging from indoor, outdoor, and partially protected ones.

Loading Dock Monitoring, Vehicle Counting




Challenge

For an efficient flow of products in and out of a truck, it is important that operators are immediately notified of a truck's arrival. In order to accurately detect the presence of vehicles at a loading dock, a reliable sensor is needed to withstand extreme weather conditions.

Solution

- The T30R can be set up as a retroreflective sensor to provide the most reliable detection with no dead zone
- Compact housing for simple installation



Retroreflective Sensing

Detecting Parking Spot Availability in a Public Ramp




Challenge

Drivers entering major multi-level parking structures often struggle to find open parking spaces. To improve efficiency, a method is needed to inform them of real-time parking availability and guide them to the appropriate open spaces.

Solution

- Placing a K50R sensor above each parking space, provides an accurate method for counting the number of occupied or available parking spaces, and presenting that data to incoming drivers
- K50R sensors can be placed in ramps that are exposed to outdoor air and varying temperatures
- K50R Pro sensors feature RGB LEDs, which can be set to illuminate red or green depending on the availability (or lack of availability) of a given space
- Radar sensors provide a cost-competitive alternative to other parking-spot-sensing systems



PC GUI Configuration



Accurate Vehicle Detection at Loading Docks



Challenge

Accurate vehicle detection at loading docks is crucial for businesses to sustain productivity, safety, and environmental standards. Inaccurate detection can lead to inefficiency and hazardous situations.

Solution

- The Q90R's broad field of view and robust signal strength provides flexible mounting options in various orientations to accommodate customer requirements
- The Q90R2 can track two different targets, effectively taking the place of two sensors and offering even more application flexibility



Multi-Dimensional Detection

Train Detection Including Flatbeds and Tank Cars




Challenge

Railways present many difficulties for sensing equipment. The harsh and dirty environment is extra challenging. Passing trains create high winds and kick up dirt. Proper identification of the content on cargo trains is essential. Radar sensors detect container trains to activate RFID antennas.

Solution

- The Q130R radar sensor is an effective alternative to ultrasonic or photoelectric sensors
- Radar technology is unaffected by wind or by dust and dirt buildup on the sensor
- FMCW radar can detect both stationary and moving targets, making it a more reliable solution than doppler radar



Resistant to Weather

Vehicle Detection (continued)



Car Wash




Challenge

Reliably detecting a vehicle in a car wash can be problematic. Steam, fog, water spray, and temperature changes are challenging for some types of sensors.

Solution

- The T30RW uses radio waves to reliably detect the vehicle, ignoring fog, steam and water
- The IP67, IP69K-rated housing dependably operates in the most harsh environments
- Superior temperature stability provides consistent measurements even during extreme temperature swings

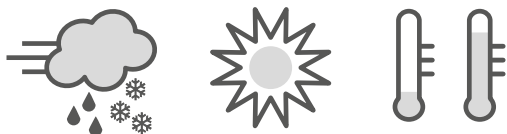

Resistant to Weather

Electric Vehicle Charging




Challenge

Shared electric vehicle services require a method to keep unauthorized non-electric vehicles from parking at charging stations, which are generally located in outdoor public places.

Solution

- A K50R radar sensor installed inside a charging station can detect the presence of a vehicle parked at that station, at any time of day and in any weather condition
- If a parked vehicle is detected but not plugged in for charging, a signal is sent to a central location, alerting authorities so that the vehicle can be removed
- Because the K50R has a short operating range with a maximum distance of 2.5 meters, it can safely ignore irrelevant targets outside of the parking area
- The sensor can be housed within the body of typical charging stations to prevent potential vandalism




Ignore Certain Materials within Dead Zone

Positioning Feedback

Precise positioning of industrial equipment is important to prevent damage and reduce downtime, but challenging environmental conditions including rain, snow, fog, sun, and wind can make it difficult for operators to see and can have an impact on the reliability of other sensor technology. Banner radar devices provide reliable outdoor performance and the 122 GHz models provide the accurate measurements and short deadzones often required for these applications. Dual discrete outputs are available for slow and stop positions for port equipment, such as reach stackers and container handlers. Analog and IO-Link options are also available for absolute distance measurement values to guide the approach of ground support equipment, such as baggage handlers or de-icing vehicles.

Reach Stacker

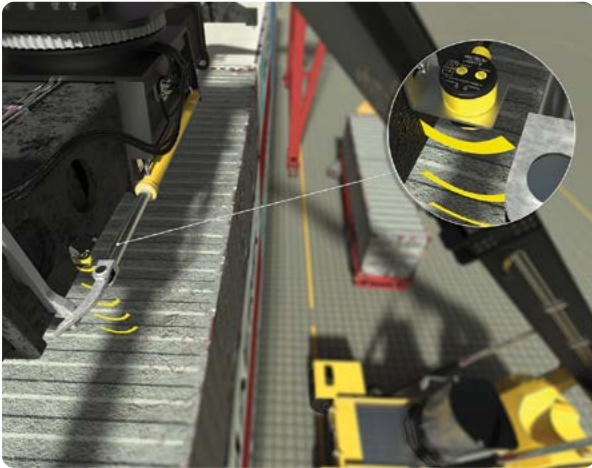


Challenge

At large ports, shipping containers need to be quickly and safely moved from one place to another. Because of this speed, lifting equipment often collides with containers, resulting in lost time and damaged goods and equipment.

Solution

- The T30R with dual discrete outputs can provide collision protection with safe speed and stop positions
- The robust IP67-rated housing and radar beam is ideal for working outdoors



Dual Zone

Ground Support Equipment



Challenge

Damaging an airplane results in expensive repairs and disruptive delays, as any contact with the aircraft requires it to be pulled from service for inspection. New standards are requiring ground support equipment such as baggage handlers to be equipped with collision-avoidance sensors such as the Q90R2.

Solution

- The Q90R2 measures the distance of ground support equipment from the aircraft and signals an alert when it reaches a programmed distance to prevent collisions
- The Q90R2's configurable 120° beam pattern reliably detects curved surfaces, such as the body of an airplane
- Radar sensors are resistant to ambient weather and temperature changes



Precise Detection



Wide Beam Radar Sensors

Collision Avoidance

In many industries including ports, mining, and agriculture, mobile equipment is a large investment, and damage to that equipment results in downtime and requires costly repair or replacement. Banner Engineering's radar sensors are the perfect rugged solution for collision avoidance, even in harsh outdoor conditions. Sensing functions are unaffected by wind, rain or snow, fog, sunlight, humidity, and fluctuating air temperatures. The sensors also utilize a robust steady-state design that is more durable than laser products with moving parts.

Reliable Forklift Collision Awareness



Challenge

Forklifts used in manufacturing settings can pose a risk of damaging nearby equipment. Many obstructions in the environment may not be accurately detected by optical or ultrasonic technologies. Additionally, other sensing technologies struggle in the diverse environments where forklifts operate, particularly outdoors.

Solution

- The Q90R2 is an effective solution for driver collision awareness
- When used in conjunction with a light or audible indicator, the Q90R2 can detect almost any potential hazard and provide clear communication to operators or bystanders, keeping operations running smoothly and preventing damage to assets.



Configurable Field of View

Collision Avoidance




Challenge

Collision avoidance solutions for mining equipment minimize the risk of accidents, save costs, and improve efficiency. Poor visibility, blind spots, dust and debris, and ambient weather conditions can reduce the effectiveness of collision-avoidance measures.

Solution

- Q130RA radar sensors are installed at the front and rear of mining vehicles and provide active object detection in vehicle blind spots
- The Q130RA is unaffected by dirt, dust, wind, rain, and other environmental challenges
- The IP67-rated housing ensures reliable operation even in harsh conditions



PC GUI Configuration



Crane-to-Crane Proximity Detection




Challenge

When multiple cranes are moving in tight spaces, it's imperative to ignore adjacent shipping containers while reliably detecting the presence of another crane or obstacle to activate stop or warning signals for the operator.

Solution

- The Q240R radar sensor features a very narrow 11° by 13° beam pattern, which is ideal for monitoring a specific area without detecting adjacent objects
- With two independent, adjustable sensing zones, the sensor provides far and near proximity warning signs with the capability to detect objects up to 100 m away
- Extremely robust; provides reliable detection capabilities, which are ideal for outdoor applications



Dual Zone

RTG Collision Avoidance



Challenge

Rubber tire gantry cranes (RTG) are used in port and mobile equipment industries to transport heavy and cumbersome loads. Since RTG cranes are hauling such large loads, it is vital to ensure they move safely throughout the port area to avoid collisions.

Solution

- The Q120R radar sensor has a narrow beam pattern, high sensitivity, and long-range detection to view obstacles in the way of the crane
- The sensor has no moving parts, and its rugged design resists high-shock and vibration conditions better than laser scanners



No Moving Parts

Tank-Level Monitoring

Storage tanks, totes, and containers can be found in a wide variety of environments, from indoor or outdoor installations to above or below ground deployments. Properly monitoring and managing levels inside these tanks can help owners and asset managers increase productivity and profitability.

Plastic Tank Level




Challenge

Mounting a sensor inside a tank is often impractical, and it is not an ideal setup if direct contact with a liquid substance could damage or negatively affect the sensor.


Solution

- Easily installed outside the tank with the SMT30RTM tank bracket
- The high-frequency radio wave signal penetrates through the plastic container wall down to the liquid's surface.



Ignore Certain Materials within Dead Zone

Quench Tank Level

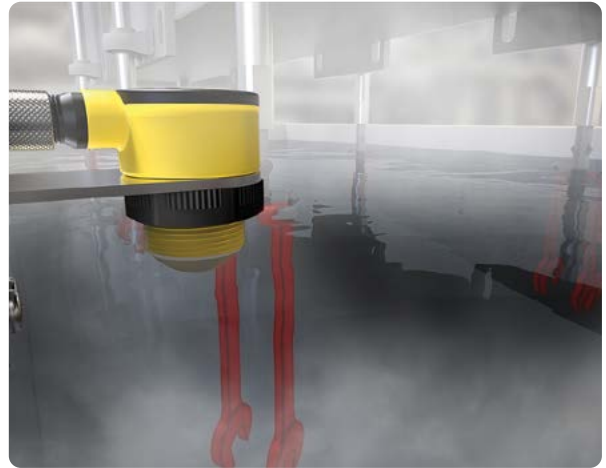

Challenge

When die-cast metal parts are hardened in a quench tank, the liquid level must be refilled to ensure that the parts are completely submerged. Ultrasonic and photoelectric sensors would not be effective for tank-level measurement because the process releases large amounts of steam.

Solution

- The T30R Near Range sensor uses radar to detect targets, which is effective even in the presence of steam that obscures the visibility of liquid levels
- The T30R series also excels in the presence of moisture, and it features an IP67-rated housing to protect electronic components in wet environments
- Accurate liquid level readings are especially crucial for smaller quench tanks; fortunately, the Near Range T30R features improved performance at close range, compared to the standard T30R, and a short dead zone of only 100 mm



Precise Measurement

Banner Measurement Sensor Software Overview

The Banner Measurement Sensor Software and Pro-Kit with Converter Cable allow for easy setup and configuration of range, sensitivity, and output.

- Get up and running in three easy steps: simply set the switch point distance, signal strength threshold, and response time using the intuitive configuration software. Now the radar sensor is ready to begin detecting targets.
- Easily monitor status via the software or bright on-board LED indicators.
- Visualize the application in real-time.
- Make adjustments to settings on the fly.

Navigation Toolbar


Connect to the sensor, save or load a configuration, or reset to factory defaults

Live Sensor Data and Legend

Signal strength versus distance, select options to display data on the graph

Summary pane

Displays the distance to the target, the signal strength, and the output status

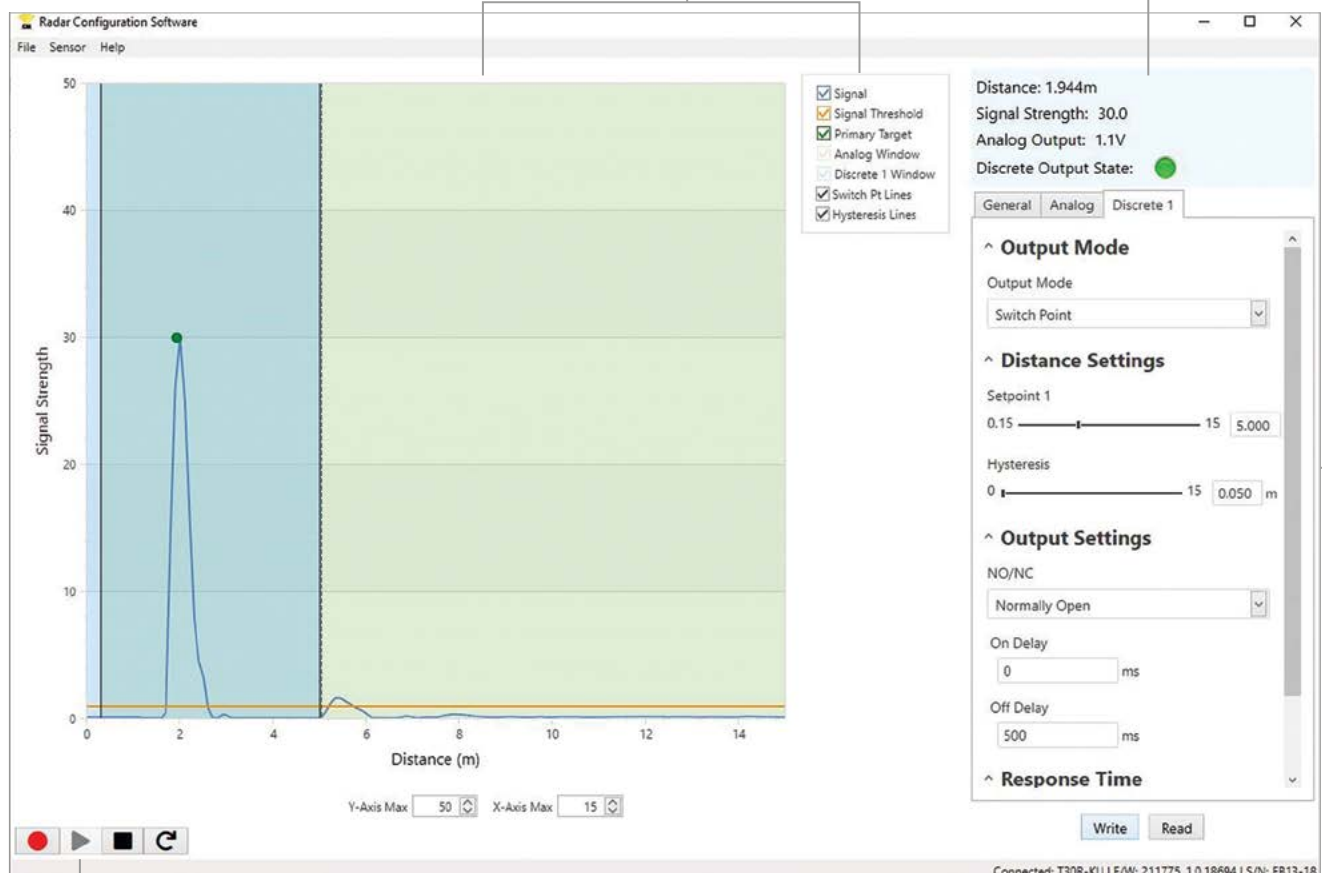

Live Sensor Data Controls

Record, freeze, and play real-time sensor data

Status Bar

Shows that the sensor is connected, a software update is available, and if the sensor data is being recorded to a file

Sensor Settings

Set the sensor parameters



Q90R and Q90R2 Series

Powerful Detection and Measurement in Nearly Any Environment

- Robust design for superior and consistent operation in any environment
- Versatility to outperform optical and ultrasonic technologies in demanding conditions
- Intuitive interface enables simple integration and streamlines troubleshooting
- Enhance equipment performance with advanced configuration and detection

Q90R Models

| Beam Pattern | Operating Frequency | Communication | Output | Model |
|--------------|---------------------|---------------|----------------|-----------------------|
| 40° x 40° | 60 GHz | IO-Link | Dual discrete | Q90R-4040-6KDQ |
| | | | 4-20 mA analog | Q90R-4040-6KIQ |
| | | | 0-10 V analog | Q90R-4040-6KUQ |

Q90R2 Model

| Beam Pattern | Operating Frequency | Communication | Output | Model |
|--------------|---------------------|---------------|----------------|--------------------------|
| 120° x 40° | 60 GHz | IO-Link | Dual discrete | Q90R2-12040-6KDQ |
| | | | 4-20 mA analog | Q90R2-12040-6KIQ |
| | | | 0-10 V analog | Q90R2-12040-6KUQ |
| | 77 GHz* | | Dual discrete | Q90R2-12040-7KDQ* |

*Global telecom approval for use in mobile equipment applications

Accessories



SMBAMSQ90R

adjustable
mounting
bracket



SMBRAQ90R

right angle
mounting bracket



DXMR90-4K

IO-Link master




PRO-KIT


Required for PC
configuration

Banner Measurement Sensor Software


Q90R2 offers enhanced configuration and multi-dimensional detection for application flexibility

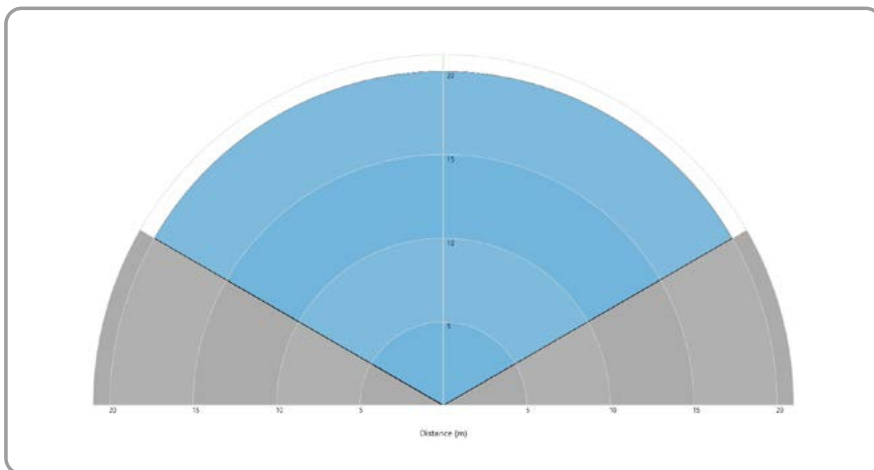

Feedback on targets includes radial distance, angular position, and target velocity, which are all useful for complex applications in difficult environments

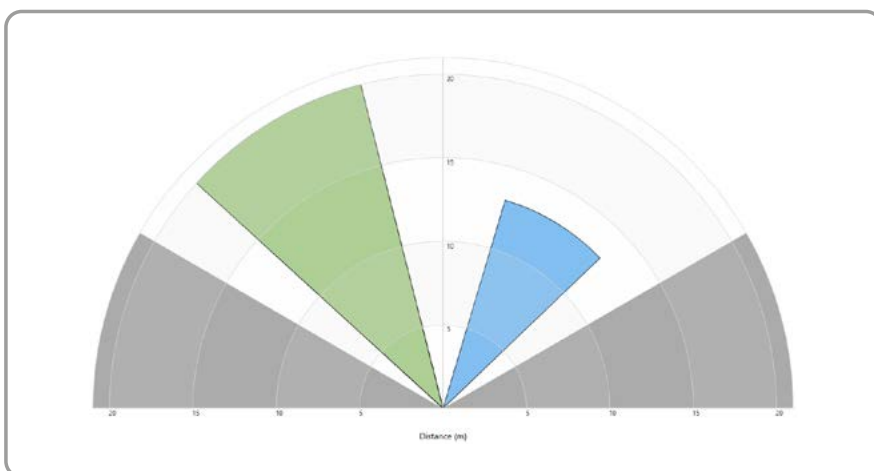

The 120° x 40° field of view is highly configurable and enables precision positioning and control

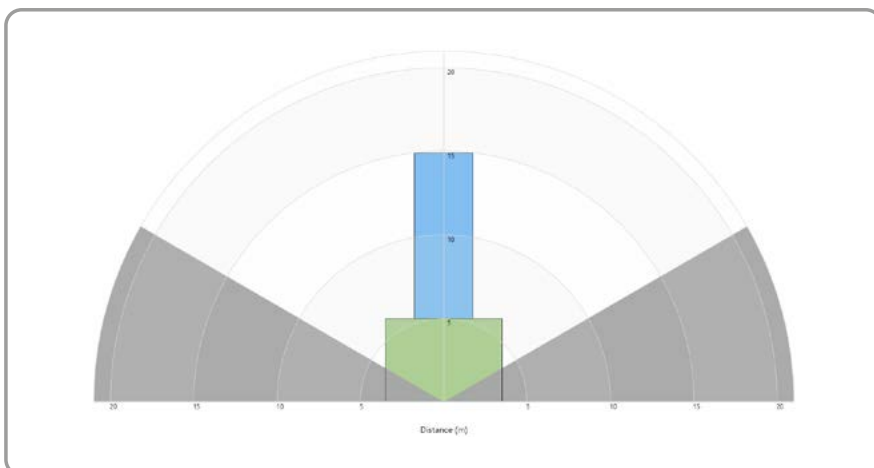

Customize advanced parameters such as window shape and target setpoints to each application



T30R Series

Bridges the Gap Between Radar and Ultrasonics

- Operates at 122 GHz with two independent, adjustable sensing zones, which enables higher-precision measurements with a narrow or wide beam pattern up to 15 meters away
- Compact, rugged IP67-rated housing for operation in harsh environments
- Detects a wider range of targets than traditional 24 GHz radar, including high-dielectric materials like metal and lower-dielectric materials like wood, rock, or organic material
- Dual discrete outputs for slow and stop positions or analog and IO-Link for absolute measurement values
- Radar configuration software, IO-Link, remote teach, and push buttons for flexible setup
- Pulse Pro output to connect to a Banner light for direct visual feedback with no external controller

| Beam Pattern | Linearity | Detection Range | Telecom Approval | Output | Model |
|--------------|--|-----------------|--|--|-----------------------|
| 15° x 15° | < ±20 mm at < 500 mm < ±4 mm > 500 mm | 0.15–15 m | US, Europe, UK, Australia/ New Zealand, Malaysia | 2 Discrete (NPN/PNP configurable) with IO-Link and Pulse Pro | T30R-1515-KDQ |
| | | | | 1 Analog (4–20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-KIQ |
| | | | | 1 Analog (0–10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-KUQ |
| | | | | 2 Discrete (NPN/PNP configurable) with IO-Link and Pulse Pro | T30R-1515-CKDQ |
| 15° x 15° | < ±4 mm | 0.1–6 m | US | 1 Analog (4–20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-CKIQ |
| | | | | 1 Analog (0–10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-CKUQ |
| 15° x 15° | < ±20 mm at < 500 mm < ±4 mm > 500 mm | 0.15–25 m | US, Europe, UK, Australia/ New Zealand, Malaysia | 2 Discrete (NPN/PNP configurable) with IO-Link and Pulse Pro | T30R-1515-LKDQ |
| | | | | 1 Analog (4–20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-LKID |
| | | | | 1 Analog (0–10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-1515-LKUQ |
| 45° x 45° | < ±20 mm at < 500 mm < ±4 mm > 500 mm | 0.3–10 m | US, Europe, UK, Australia/ New Zealand, Malaysia | 2 Discrete (NPN/PNP configurable) with IO-Link and Pulse Pro | T30R-4545-KDQ |
| | | | | 1 Analog (4–20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-4545-KIQ |
| | | | | 1 Analog (0–10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30R-4545-KUQ |

To order the pigtail QD model, add a "P" to the end of the model number (e.g., T30R-1515-KDQP)

Accessories



SMB30A

right-angle bracket



SMB30MM

right-angle bracket with curved mounting slots



SMB30SC

split clamp with swivel bracket



SMB30FA

swivel bracket with tilt and pan movement



SMBT30RTM

tank mounting bracket



SAFT30R-PVC-G2

M30 to 2 in. NPT adapter



PRO-KIT

Required for PC configuration



T30RW Series

Detection and measurement in the harshest environments

- All the benefits of the standard T30R sensor in a more resilient housing
- Compact, robust IP67, IP69K housing
- Polypropylene sleeve on the barrel provides ample chemical resistance
- Radar configuration software, IO-Link, and remote teach for flexible setup
- Pulse Pro output to connect to a Banner light for direct visual feedback with no external controller
- Common tank connection size for simplified installation

| Beam Pattern | Barrel Thread Type | Detection Range | Telecom Approval | Output | Model |
|--------------|--------------------|-----------------|--|--|---------------------------|
| 15° x 15° | M40 | 15 m | US, Europe, UK, Australia/ New Zealand, Malaysia | 2 Discrete (NPN/PNP configurable) with IO-Link and Pulse Pro | T30RW-1515-KDQ-M40 |
| | | | | 1 Analog (4–20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30RW-1515-KIQ-M40 |
| | | | | 1 Analog (0–10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link | T30RW-1515-KUQ-M40 |

Accessories



SMB40A

right-angle bracket



SMBAMS40P

flat bracket



PRO-KIT

Required for PC configuration

K50R Series

Reliable, Cost-Efficient Sensing for Challenging Environments

- For detection and measurement of moving and stationary targets
- Self contained, all-in-one solution
- Bright, visible indication; available in Pro models with configurable LEDs
- Easy setup and configuration of range, sensitivity, and output using the Banner Radar Configuration Software
- Compact, rugged IP67-rated housing withstands harsh environments
- Performance modes to customize the sensor to the application



| Beam Pattern | Housing | Range | Type | Telecom Approval | Output | Model |
|--------------|-------------|------------|----------------------------|--|----------------|-----------------|
| 80° x 60° | Flush mount | 100 mm–3 m | Standard | US, Europe, UK, Canada, Australia/ New Zealand | Dual discrete | K50RF-8060-LDQ |
| | | | Pro with Configurable LEDs | | | K50RPF-8060-LDQ |
| | | | | | | K50RF-4030-LDQ |
| 40° x 30° | Flush mount | 50 mm–5 m | Standard | | 4–20 mA analog | K50RF-4030-LIQ |
| | | | | | 0–10 V analog | K50RF-4030-LUQ |
| | | | IO-Link | | | K50RF-4030-LKDQ |
| | | | Pro with Configurable LEDs | | Dual discrete | K50RPF-4030-LDQ |
| | | | | | Dual discrete | K50RB-4030-LDQ |
| | Base mount | | Standard | | 4–20 mA analog | K50RB-4030-LIQ |
| | | | | | 0–10 V analog | K50RB-4030-LUQ |
| | | | IO-Link | | | K50RB-4030-LKDQ |
| | | | Pro with Configurable LEDs | | Dual discrete | K50RPB-4030-LDQ |

Accessories



SMB30A

Right-angle
mounting bracket



SMBK50RA

Right-angle
mounting bracket



SMBAMSK50R

Adjustable
mounting bracket



MQDC-506-USB

pro converter
cable



Q130RA Series

PC GUI Configurable, Narrow and Wide Beam Sensor

- One adjustable sensing zone to reliably detect moving or stationary objects up to 40 meters away
- Simple setup and precise control with intuitive graphical user interface
- Unaffected by ambient weather, including rain, snow, fog, sunlight, and temperatures from -40 to 65° C
- Rugged IP67-rated housing for dependable long-term operation in harsh environments

| Beam Pattern | Range | Telecom Approval | Output | Model |
|--------------|-------|--|---|------------------------|
| 90° x 76° | 24 m | US, Europe, UK, Canada, China, Australia/New Zealand, Brazil | Bipolar NPN/PNP N.O./N.C. Configurable | Q130RA-9076-AFQ |
| 24° x 50° | 40 m | US, Europe, UK, China, Australia/New Zealand, Brazil | | Q130RA-2450-AFQ |

Accessories



SMBWSQ120
rear-mount
rain cover



SMBQ240SS1
bracket for ±20°
of tilt on one axis



SMBQ240SS2
bracket for ±20° of
tilt on second axis



SMBQ240SS3
bracket for ±20° of
tilt in all directions



Q130WS
hydrophobic
coated rain cover



MQDC-506-USB
pro converter
cable



Q240RA Series

Narrowest Beam, Longest Range Sensor

- Reliably detect moving or stationary objects within a narrow beam pattern up to 100 meters away
- Two independent, adjustable sensing zones
- Narrow 11° × 13° beam pattern
- Rugged IP67-rated housing withstands harsh environments

| Range | Output | Telecom Approval | Model |
|-------|---|--|------------------------|
| 40 m | 2 Discrete (NPN/PNP configurable) | US, UK, Canada, Brazil, Mexico, Taiwan | Q240RA-US-AF2Q |
| | | US, Europe, UK, Australia/New Zealand, Brazil, Japan, Singapore, South Korea | Q240RA-EU-AF2Q |
| | | China | Q240RA-CN-AF2Q |
| 100 m | 2 Discrete (NPN/PNP configurable) | US, UK, Canada, Brazil, Mexico, Taiwan | Q240RA-US-AF2LQ |
| | | US, UK, Europe, Australia/New Zealand, Brazil, Japan, Singapore, South Korea | Q240RA-EU-AF2LQ |
| | | China | Q240RA-CN-AF2LQ |
| 100 m | 1 Analog (0–10 V) and 1 Selectable NPN/PNP | US, UK, Canada, Brazil, Mexico, Taiwan | Q240RA-US-ULQ |
| 100 m | 1 Analog (4–20 mA) and 1 Selectable NPN/PNP | US, UK, Canada, Brazil, Mexico, Taiwan | Q240RA-US-ILQ |
| | | US, Europe, UK, Australia/New Zealand, Brazil, Japan, Singapore, South Korea | Q240RA-EU-ILQ |

Accessories



SMBQ240SS1

bracket for ±20° of tilt on one axis



SMBQ240SS2

bracket for ±20° of tilt on second axis



SMBQ240SS3

bracket for ±20° of tilt in all directions



Q240WS

hydrophobic coated rain cover



QT50R Series

QT50R Series sensors are available in both adjustable-field models, which can use diffuse sensing to detect an object, or in retroreflective models, which use a reference signal retroreflective target, floor, wall, or other stationary object) for reliable detection of weak objects.

QT50R-AF

Widest Beam, Small Package

- Detects objects up to 24 m away
- Analog and discrete outputs available
- One or two independent, adjustable sensing zones
- Total beam pattern 90° (± 45) x 76° (± 38)
- Rugged IP67-rated housing withstands harsh environments

QT50R-RH

Robust Retroreflective Sensing Mode

- Detects objects up to 12 m away
- Effective beam equals size of retro target
- Ignores objects in the background beyond the retroreflective target
- Rugged IP67-rated housing withstands harsh environments

| Range | Sensing Mode | Output | Telecom Approval | Model |
|-----------|------------------|---|---|-----------------|
| 24 m | Adjustable-field | Bipolar NPN/PNP | US, UK, Canada, and Brazil | QT50R-US-AFHQ |
| | | | US, Europe, UK, Australia/New Zealand, Japan, China | QT50R-EU-AFHQ |
| | | | South Korea* | QT50R-KR-AFHQ |
| | | | Taiwan | QT50R-TW-AFHQ |
| 24 m | Adjustable-field | 2x Bipolar NPN/PNP | US, UK, Canada, and Brazil | QT50R-US-AF2Q |
| | | | US, Europe, UK, Australia/New Zealand, Japan, China | QT50R-EU-AF2Q |
| | | | Taiwan | QT50R-TW-AF2Q |
| 24 m | Adjustable-field | 2x Selectable NPN/PNP and 0–10 V analog | US, Europe, UK, Australia/New Zealand | QT50R-EU-AF2UQP |
| 3.5 m | Adjustable-field | Bipolar NPN/PNP | US, Europe, UK, Australia/New Zealand, Japan, China | QT50R-EU-AFSQ |
| 0 to 12 m | Retroreflective | Bipolar NPN/PNP | US, UK, Canada, and Brazil | QT50R-US-RHQ |
| | | | US, Europe, UK, Australia/New Zealand, Japan, China | QT50R-EU-RHQ |

For five-wire 2 m integral cable versions, remove suffix Q from the model number (e.g., QT50R-EU-AFH)

* Models for South Korea: 12 to 24 V dc

Accessories



QT50RCK

weather deflector



SMB30SC

split clamp bracket
with swivel





SMB30MM


right-angle bracket
with curved
mounting slots



QT50RWS

hydrophobic
coated rain cover

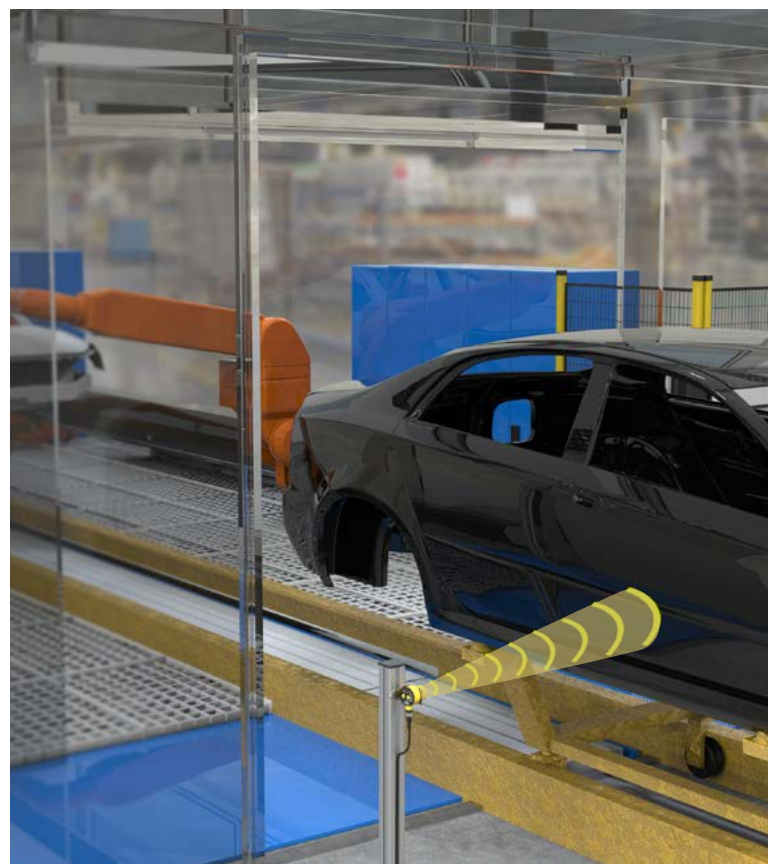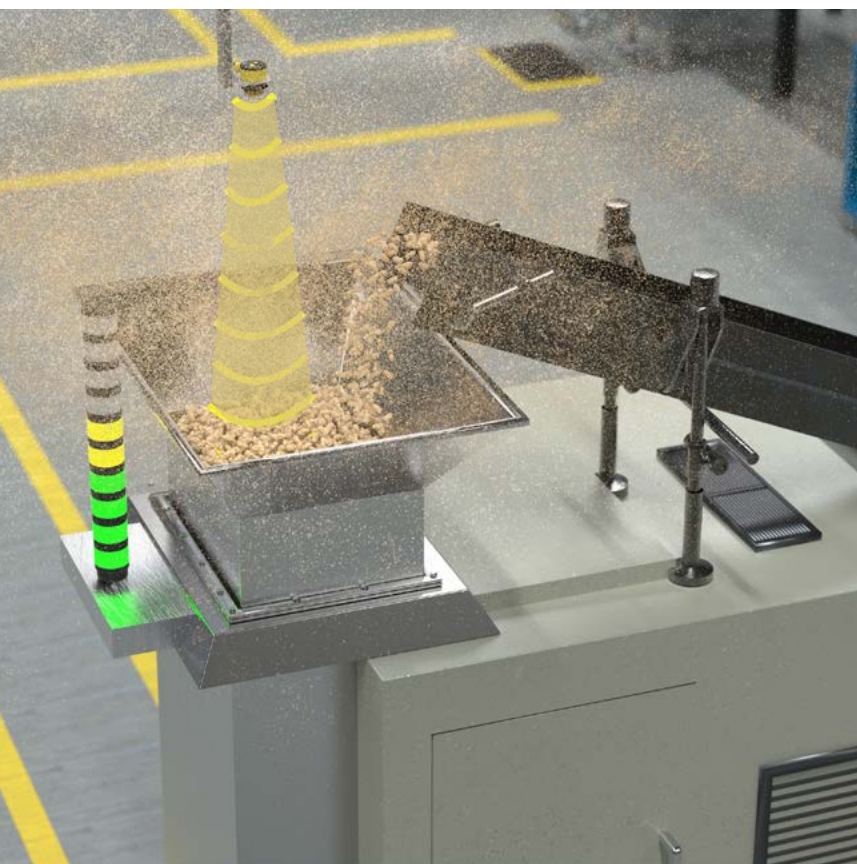

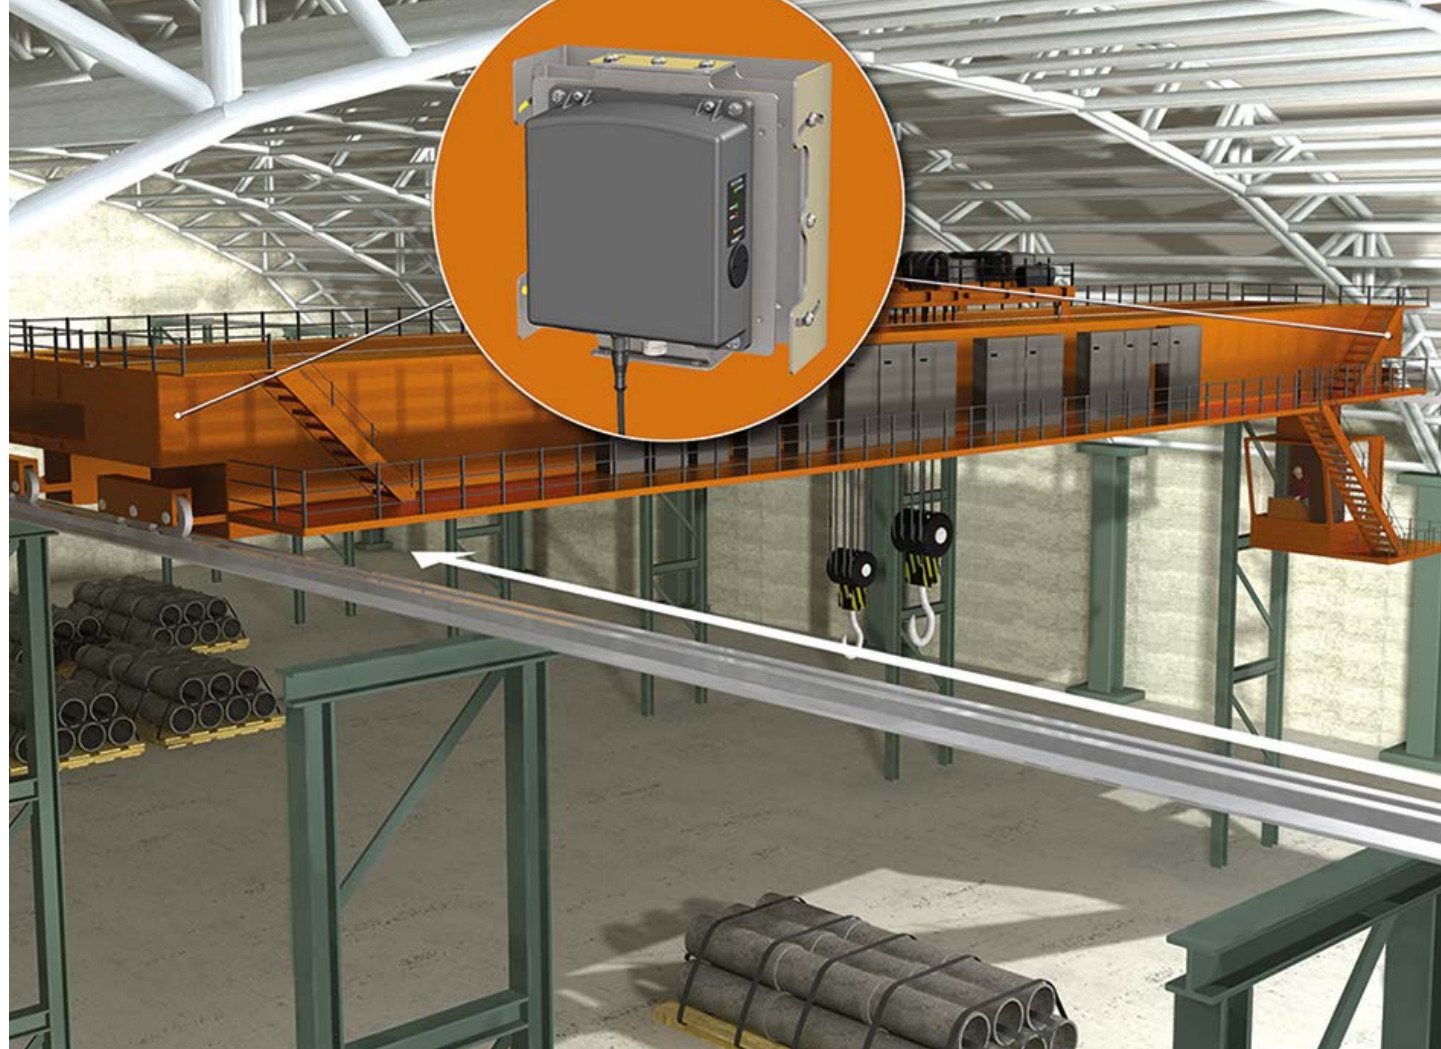

Smarter Automation. Better Solutions.™

Banner Engineering designs and manufactures industrial automation products including sensors, smart IIoT and industrial wireless technologies, LED lights and indicators, measurement devices, machine safety equipment, as well as barcode scanners and machine vision. These solutions help make many of the things we use every day, from food and medicine to cars and electronics. A high-quality, reliable Banner product is installed somewhere around the world every two seconds. Headquartered in Minneapolis since 1966, Banner is an industry leader with more than 10,000 products, operations on five continents, and a worldwide team of more than 5,500 employees and partners. Our dedication to innovation and personable service makes Banner a trusted source of smart automation technologies to customers around the globe.

