
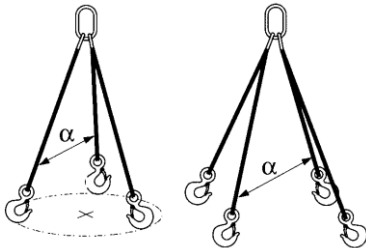


TABLEAU DES CHARGES POUR ÉLINGUES CHÂÎNES

	SIMPLE DIRECT	NŒUD COULISSANT	ANGLE D'INCLINAISON	
MODE D'ÉLINGAGE				

Angle d'utilisation	Vertical	$0^\circ < \alpha \leq 90^\circ$	$91^\circ < \alpha \leq 120^\circ$	$0^\circ < \alpha \leq 90^\circ$	$90^\circ < \alpha \leq 120^\circ$	//
Facteur d'élingage	1.0	1.4	1	2.1	1.5	0.8

Ø En mm	CHAÎNE GRADE 80 CMU en kg					
6	1120	1600	1120	2360	1700	
7	1500	2120	1500	3150	2240	
8	2000	2800	2000	4250	3000	1600
10	3150	4250	3150	6700	4750	2520
13	5300	7500	5300	11200	8000	4240
16	8000	11200	8000	17000	11800	
19	11200	16000	11200	23600	17000	
20	12500	17000	12500	26500	19000	
22	15000	21200	15000	31500	22400	
26	21200	30000	21200	45000	31500	
32	31500	45000	31500	67000	47500	

Ø En mm	CHAÎNE GRADE 100 CMU en kg					
6	1400	1960	1400	2940	2100	
7	1900	2660	1900	3990	2850	
8	2500	3500	2500	5250	3750	
10	4000	5600	4000	8400	6000	
13	6700	9380	6700	14070	10050	
16	10000	14000	10000	21000	15000	
19	14000	19600	14000	29400	21000	
20	16000	22400	16000	33600	24000	
22	19000	26600	19000	40000	28500	
26	26500	37100	26500	55650	39800	

Ø En mm	CHAÎNE GRADE 120 CMU en kg					
7	2360	3300	2360	4960	3540	
8	3000	4200	3000	6300	4500	
10	5000	7000	5000	10500	7500	
13	8000	11200	8000	16800	12000	



ARCHITECTURE MODERNE
EN CÂBLE ET FILET INOX

// ACCESSOIRES DE LEVAGE
ET DE MANUTENTION
ARRIMAGES PL & VL



SYLTHOM

9 Avenue de la Fontaine Z.I. de Beaucozé 49070 BEAUCOUZÉ RCS Angers 488 118 431

☎ 02.41.25.17.36 - ✉ info@sylthom.com - 💻 www.sylthom.com